


TYPE	BOILER CAP. KW	H.S. m2	WEIGHT KG	A	B	C	E	F	H	J	K	L	M
L 06C	600	56	544	710	460	765	1326	985	2045	286	214	855	177
L 12C	1200	99	663	810	576	881	1381	1085	2045	286	214	855	235
L 18C	1800	141	798	1110	576	881	1474	1385	2045	373	264	905	235
L 24C	2400	188	909	1110	692	997	1471	1385	2045	373	264	905	293
L 30C	3000	235	1056	1110	827	1132	1526	1385	2095	373	314	955	351
L 36C	3600	283	1180	1310	827	1132	1626	1585	2095	480	314	955	351
L 42C	4200	339	1351	1310	983	1288	1681	1585	2145	480	364	1005	409
L 48C	4800	367	1416	1310	1041	1346	1681	1585	2145	480	364	1005	438
L 60C	6000	452	1634	1310	1235	1540	1671	1585	2195	420	414	1055	525
L 72C	7200	528	1805	1510	1235	1540	1671	1785	2195	420	414	1055	525
L 84C	8400	660	2117	1510	1492	1797	1651	1785	2195	420	399	1040	641
L 96C	9600	707	2264	1610	1492	1797	1821	1885	2230	535	449	1090	641
L108C	10800	778	2434	1610	1668	1973	1816	1885	2230	535	449	1090	696
L120C	12000	934	2780	1910	1668	1973	1821	2185	2230	535	449	1090	696
L140C	14000	1060	3184	1910	1842	2147	1871	2185	2280	535	499	1140	783



TYPE	D	G	N	P
L 06C	400	200	DN065	3/4"
L 12C	400	300	DN065	3/4"
L 18C	500	350	DN080	3/4"
L 24C	500	450	DN080	1"
L 30C	600	450	DN100	1"
L 36C	600	500	DN100	1"
L 42C	700	550	DN100	2x1"
L 48C	700	600	DN100	2x1"
L 60C	800	650	DN125	2x1"
L 72C	800	700	DN125	2x1"
L 84C	800	700	DN150	2x1.25"
L 96C	900	800	DN150	2x1.25"
L108C	900	850	DN150	2x1.25"
L120C	900	950	DN150	2x1.25"
L140C	1000	950	DN150	4x1"

Flange connections acc. EN1092-1 PN6

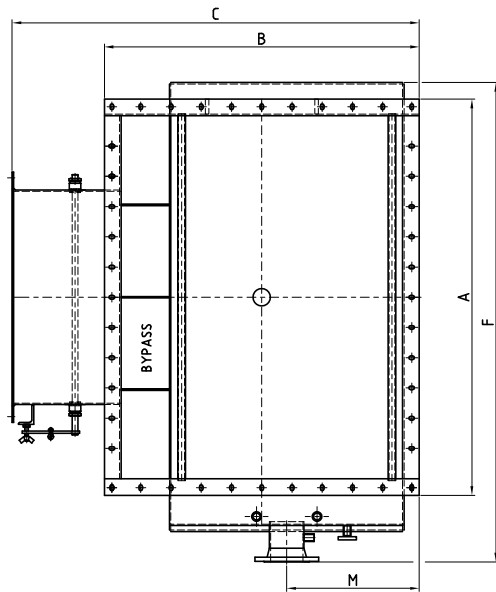